



**SALCHA-DELTA SOIL AND WATER CONSERVATION DISTRICT**

P.O. Box 547  
DELTA JUNCTION, AK 99737  
(907) 895-6279  
FAX: (907) 895-6278

---

## **REQUEST FOR QUOTE**

Released August 24th 2023

**Project Name:** Fort Greely AHA Material Delivery

**Project #:** 23-2-5802

**Due Date:**

Proposals will be accepted starting on Wednesday, September 27, 2023 at 4:00 p.m. Proposals received before this time will be returned to the sender and marked “non-responsive.”

Proposals must be received by Thursday, September 28, 2023 at 10:00 am. Proposals received after this time will be returned to the sender and marked “non-responsive.”

**Email:** [rfp@salchadeltaswcd.org](mailto:rfp@salchadeltaswcd.org) Please call (907) 895-6279 to confirm receipt of email.

**Questions and Addendum:**

All questions regarding this RFP must be submitted via email only [rfp@salchadeltaswcd.org](mailto:rfp@salchadeltaswcd.org) and received by:

Monday, September 25, 2023 @ 10:00 am

Questions submitted after that time will not be acknowledged.

It is the contractor’s responsibility to check for Addendum prior to submitting a proposal.

All submitted questions will be answered through an Addendum released via email and at [rfp@salchadeltaswcd.org](mailto:rfp@salchadeltaswcd.org) on the following dates:

Addendum 1: Tuesday, September 26, 2023

**Requirements:**

Submitted Quotes must be signed and include the company’s name and contact information.

**Contractor will be required to:**

Comply with all applicable laws and regulations (e.g. OSHA and MSHA regulations), and obtain all necessary permits.

Proof of vehicle insurance must be available in each vehicle and presented upon request.

**Stop Work:**

The Salcha-Delta SWCD reserves the right to terminate a contract by written notice, in whole or in part, when it is in the best interest of the Salcha-Delta SWCD to do so. Reasons for termination may include, but are not limited to:

- Discovery of cultural artifacts or environmental contaminants;
- Safety issues;
- Adverse site conditions – weather, moisture, etc.

**NOTE:**

The Salcha-Delta SWCD reserves the right to refuse any and all quotes.

Depending on funding, there is a potential for increased quantity to be awarded under this contract; increases will be awarded at our discretion and without re-bidding.

**Summary of RFQ**

This RFQ is for the purchase\*, transportation, and stockpile of material to the location designated on the map in Attachment 2.

\*There is not a designated source for the material. If the contractor-proposed source is regulated by the Alaska Department of Natural Resources (ADNR), the Salcha-Delta SWCD will be responsible for permitting and royalty fees.\*

Materials shall not be intermixed, and each material type shall be separately accessible for loading.

The classified riprap must be stockpiled a minimum of 12' high.

All material shall be stockpiled and available by March 23, 2024,

Volume measurements will be made by Salcha Delta Soil and Water Conservation District using a GPS stockpile survey. The floor will be surveyed prior to any material being placed.

**Payment**

Payment will be at the total job price. Partial billing is approved in the following guidelines. 25% of the total job price may be billed once 1/3 of the rock is stockpiled. 50% of the total job price may be billed once 2/3 of the material is stockpiled. The remaining will be billed at the completion of the contract.

### Material Requirements:

- Rock shall be angular, not round, and have no more than 50% wear at 500 revolutions as determined by AASHTO T96.
- In addition to AASHTO T96 requirement noted above, acceptability of stone quality is determined by visual inspection. The Engineer may reject materials not found to meet the specified requirements at any time during the performance of the contract, at the source or designated stockpile site.
- The material shall be stockpiled at the location designated on Attachment 1 not later than 23 March 2024.

## QUOTE SHEET

**Quote Due:** Thursday, September 28, 2023 at 10:00 am

**Project Name:** Fort Greely AHA Material Supply & Delivery

**Project Number:** 23-2-5802

**Contractor Company:** \_\_\_\_\_

**Representative Name:** \_\_\_\_\_

**Contact Phone number:** \_\_\_\_\_

**Description of proposed pit location (location, ownership):**

Item Description	Total Price
Rock as specified in Table 1 (below)	\$


<b>Table 1: Material Requirements</b>				
Item Description	Quantity	Unit	Unit Cost	Total
Armor Stone/Large Boulders (6'x4'x2') Tolerance: <ul style="list-style-type: none"> <li>• Long axis: 6' +/- 1'</li> <li>• Intermediate axis: 4' +/- 1/2'</li> <li>• Short axis: 2' +/- 1/2'</li> </ul>	225	Each		
Class III 50-100% weighing 700 pounds or more 0-15% weighing up to 25 pounds 0-10% weighing more than 1400 pounds	2500	Cubic yards		
Class II 50-100% weighing 200 pounds or more 0-15% weighing up to 25 pounds 0-10% weighing more than 400 pounds	1000	Cubic yards		
Class I Rock Riprap 0-50% weighing up to 25 pounds 0-10% weighing more than 50 pounds	500	Cubic yards		
Rock shall be angular, not round, and have no more than 50% wear at 500 revolutions as determined by AASHTO T96.				

**Addendum 1 Received:** \_\_\_\_\_ (initial)

**Submitted by:** \_\_\_\_\_ **Date:** \_\_\_\_\_

# ATTACHMENT 1: DELIVERY LOCATION MAP

## FORT GREELY AHA MATERIAL DELIVERY 23-2-5802

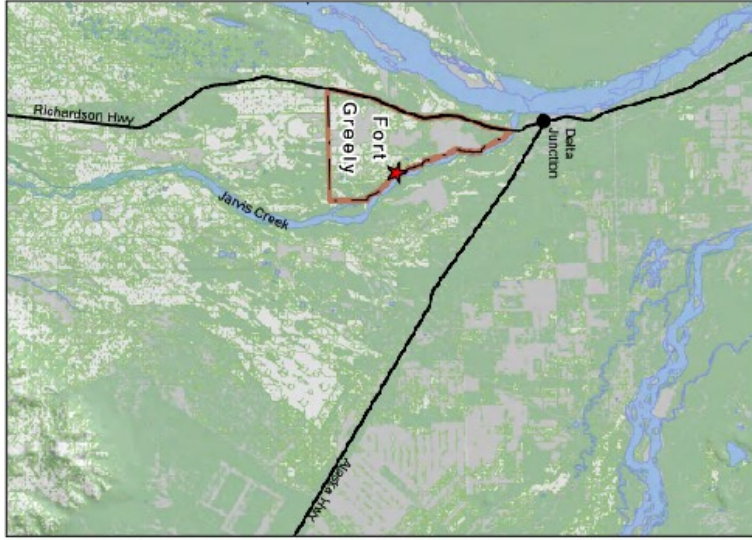

SACHA-DATA, INC. AND WATER CONSERVATION DISTRICT IS NOT RESPONSIBLE FOR SAFETY PROGRAMS, METHODS OR PROCEDURES GENERAL OR NOT CALLED OUT. THE SPECIFICATIONS SHALL CONFORM TO STANDARDS OF INDUSTRY. DRAWINGS ARE FOR USE ON THIS PROJECT ONLY AND ARE NOT INTENDED FOR REUSE.

PROJECT: QUARRY ROAD REALIGNMENT

OWNER: